


P1,P2: M-Y827A
M-833A

Customer No: No.1

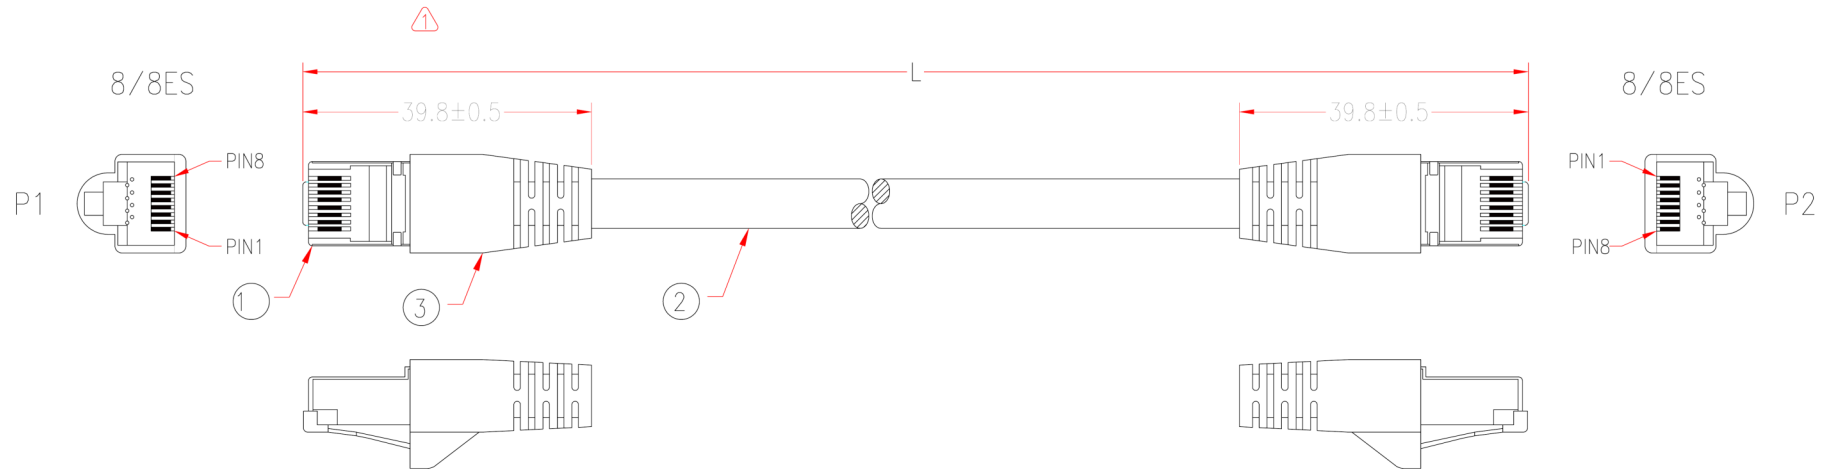

PIN ASSIGNMENT			
P1		P2	
1	—	1	WHITE/ORANGE
2	—	2	ORANGE
3	—	3	WHITE/GREEN
6	—	6	GREEN
4	—	4	BLUE
5	—	5	WHITE/BLUE
7	—	7	WHITE/BROWN
8	—	8	BROWN
SHIELD	—	SHIELD	

* NOTE: All relevant materials are complied with RoHS directive .

3	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BLUE(PT301U)		M304
2	4 TWISTED PAIRS CAT.6A 24AWG STP WITH CROSS, OD6.8mm, JACKET BLUE(PT301U)	L+20mm	M345
1	8P8E MODULAR SHIELDED PLUG, GOLD PLATING 50u' ON CONTACTS, DUAL(P8-031)	2	M205
No.	DESCRIPTION	Q'TY	Supplier
APPROVED		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
CHECKED			
DRAWING			
DATE	27/MAR/09	ITEM NO.	UNIT:mm