



RoHS COMPLIANT

DATE	REV.	REVISION	DRAFTING	CHECKED
	A/0			

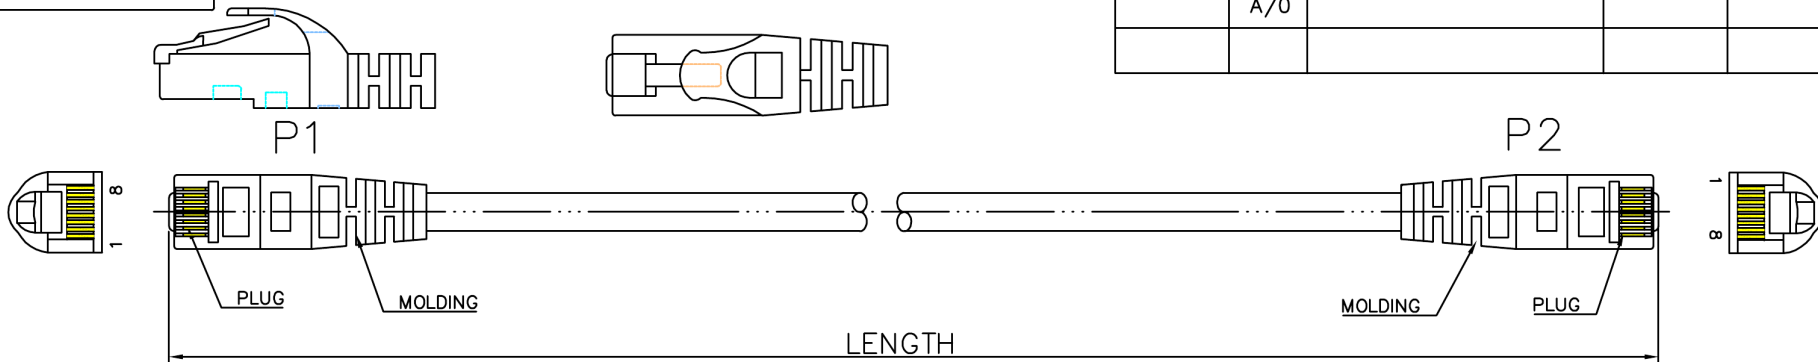

Marking: **GrandMax UTP CAT.5E/350MHz PATCH FOR GIGABIT ETHERNET ETL/3P CONFORM TO ANSI/TIA-568-C.2 & (FP0217) ISO/IEC 11801 ED.2 50288-3-2 & EN 50288-3-2 & IEC 60332-1-2 ▲ 24AWGX4P CMX(UL) c(UL) CMH E164469-XX RoHS**

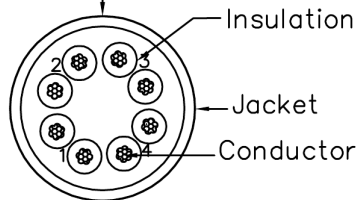

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

Conductor		Bare Copper 24AWG
Insulation		Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.98±0.06mm
Jacket	PVC	Thickness:MIN at any point:0.42mm MAX AVG:0.48mm Diameter:5.4±0.2mm

Wire	CAT. 5E UTP STR 24AWG*4P
Plug	YU-24 8P8C 50U"
Length	XXM
Color	XX

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Unless specified on the drawing, tolerances are per the follows:
 .X ± 1
 .X ± 0.2
 .XX ± 0.05



DRAW.NO	L-326	ITEM			
DEPARTMENT		DRAW	DHY	DATE	2012/03/26
SCALE		CHECKER	wuxiao	DATE	2012/03/26
UNIT	MM	SHEET	1	OF	1