



RoHS COMPLIANT

DATE	REV	DESCRIPTION	BY	CHKD
10/08/18	A/0	NEW	CAOWEN	Angel

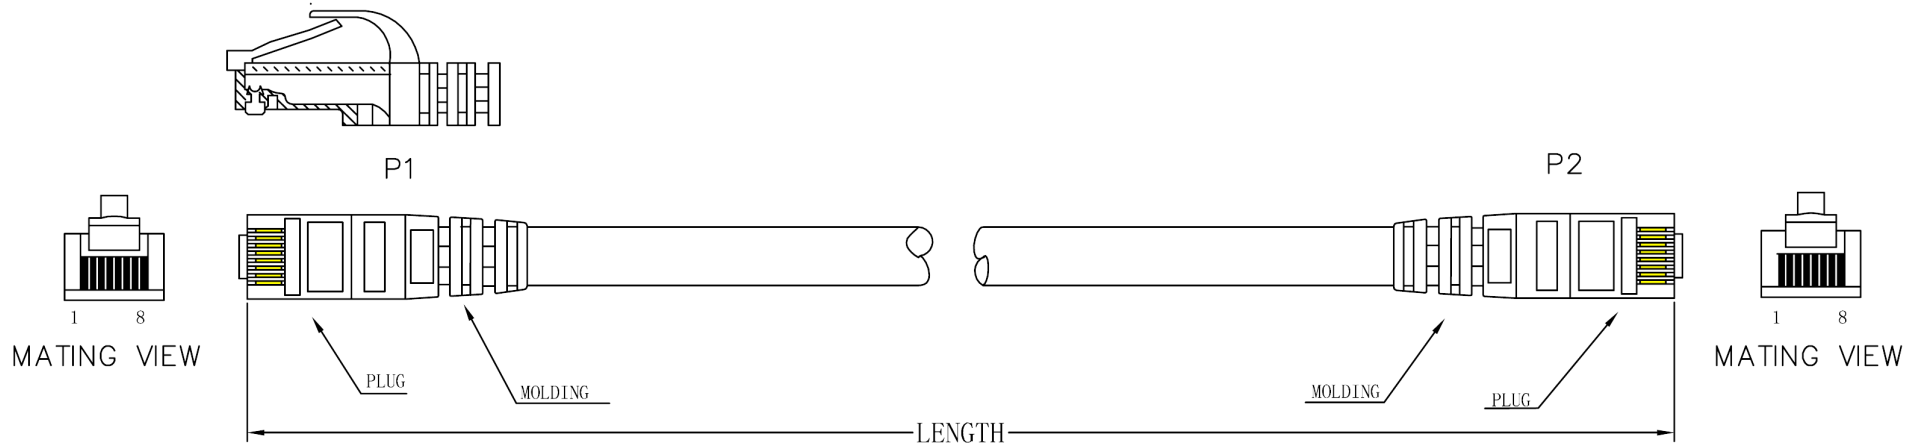

Marking: GrandMax CAT.6 UTP 550MHz PATCH FOR GIGABIT ETHERNET ETL/3P CONFORM TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 50288-3-2 & EN 50288-6-2 & IEC 60332-1-2 (leave 1.5cm space) 24AWGX4P (UL) c(UL) CMH E164469-F3 RoHS

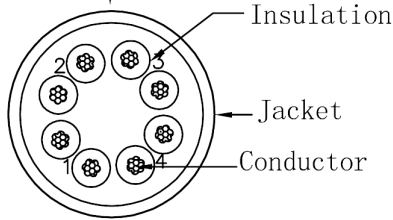

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

Conductor	Bare Copper 24AWG 7/0.196±0.015mm
Insulation	Thickness: MIN at any point: 0.15mm MAX AVG: 0.25mm Diameter: 1.04±0.06mm
Jacket	PVC Thickness: MIN at any point: 0.55mm MAX AVG: 0.65mm Diameter: 5.9±0.15mm

WIRE	CAT.6 UTP STR 24AWGX4P
PLUG	YU-24 8P8C 50U"
Length	XX
COLOR	XX

PA/R	PINOUT			
	P1 (T568B)	WIRE	P2 (T568B)	
2	1	WHT/ORG	1	
	2	ORG	2	
3	3	WHT/GRN	3	
	6	GRN	6	
1	4	BLU	4	
	5	WHT/BLU	5	
4	7	WHT/BRN	7	
	8	BRN	8	

⚠

Unless specified on the drawing, tolerances are per the follows:

.x ± 1  
.xx ± 0.2  
.xxx ± 0.05

3RD

ERP NO:	N/A	SAMPLE NO:	N/A
DOC NO:	CW-0040	Revision	A/0
CUSTOMER:		UNIT	MM
CUSTOMER P/N:		SCALE	N/A
DESCRIPTION	CAT.6 UTP STR 24AWGX4P	PAGE	1/1
		DATE	2010/08/18
APPROVAL		CHECK	Angel
		DRAW	CAOWEN