



1	2	3	4	5	6	7	8	9	10
CUSTOMER NAME	YC					DATE	REV	DESCRIPTION	BY
CUSTOMER Part No.	CAT6-xxxB-CCC-S					2016.09.18	A/0	NEW	LHY
						2016.10.08	A/1	CHANGE	LHY

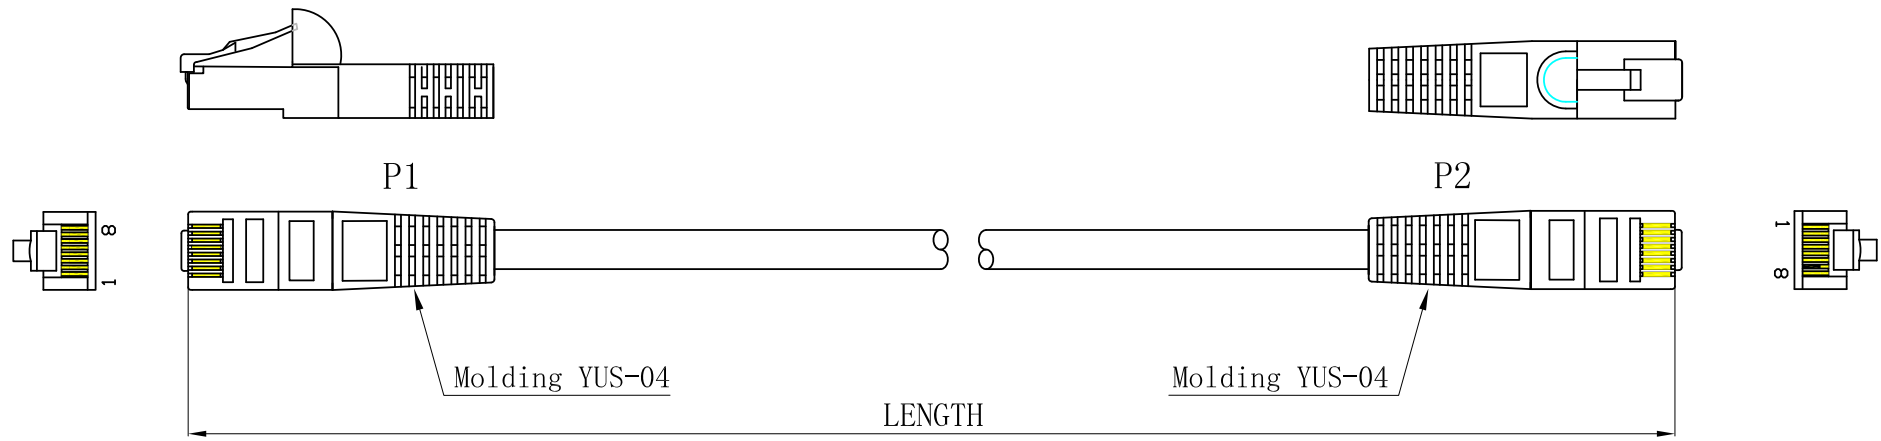

Marking: CAT.6 FTP PATCH 3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-5-2 & IEC 60332-1-2 ▲ 26AWGX4P CM(UL) c(UL) E164469-XX

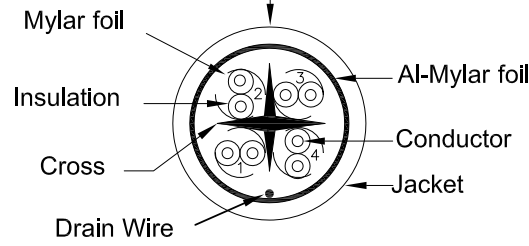

PINOUT			
P1(T568B)		P2(T568B)	WIRE
1	X	1	WHT/ORG
2		2	ORG
3	X	3	WHT/GRN
6		6	GRN
4	X	4	BLU
5		5	WHT/BLU
7	X	7	WHT/BRN
8		8	BRN
S	---	S	---

Length	Tolerance
1FT	± 15
2FT	± 15
3FT	± 15
5FT	± 15
6FT	± 15
7FT	± 20
8FT	± 20
10FT	± 20
15FT	± 20
25FT	± 40
50FT	± 60
75FT	± 70
100FT	± 70

NOTE:
 - Individually packed on clear PE Bag with one label for part number.
 - Finished cable assembly is RoHS and REACH Compliance

Conductor	Bare Copper 26AWG
Insulation	Thickness:MIN at any point:0.20mm MAX AVG:0.21mm Diameter:0.86±0.06mm
Jacket	PVC Thickness:MIN at any point:0.60mm MAX AVG:0.65mm Diameter:6.0±0.2mm
Wire	CAT.6 FTP 26AWGX4P
Plug	YUS-04 8P8C 50u"
Color	YY

Part No.	CAT6-xxxB-CCC-S			
Description	CAT. 6 FTP (With Cross) 26AWGX4P PVC YS-09			
UNIT	mm	APPROVAL	CHECKER	DRAWER
PAGE	1/1	2016.10.08		LHY

2016.10.08
鍾曙光